

VM-32D2

Customizable Industrial Monitor



- 32" HD Color LCD Monitor
- HD Resolution: 1366 x 768 (WXGA) 720p/60
- Wide Viewing Angle (178°)
- Aspect Correction: Does Not Distort 4:3 Image on 16:9 Screen
- Video Inputs: VGA, HDMI, Composite (BNC Loop-Thru)
- NTSC/PAL Auto-Recognition
- Picture-In-Picture
- 12VDC Output
- Lockable OSD Controls
- Rugged Metal Housing
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The VM-32D2 HD monitor is ideal for industrial, commercial, A/V, broadcast and medical applications. It provides crystal-clear HD images, picture-in-picture, and more. It is available in a standard enclosure or open frame, panel mount or touch screen configurations. An extensive list of available OEM options enables you to customize the VM-32D2 to your specific needs. Visit www.TRU-VuMonitors.com for more details.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.


Specifications

LCD Panel	32" TFT Color LCD
Display Resolution	1366 x 768 (WXGA) 720p/60
Viewing Area	27.48" (W) X 15.43" (H)
Pixel Pitch	0.511mm X 0.511mm
Display Colors	16.7 Million
Aspect Ratio	16:9
Brightness	500 nit
Contrast Ratio	1500:1
Viewing Angle	178° (H) x 178° (V)
Response Time	6.5 msec (gray to gray)
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons or Remote Control
Video Inputs	VGA, HDMI, Composite (BNC Loop-Thru), NTSC/PAL Auto-Recognition
Analog Video In/Out	3 BNC Inputs / 1 BNC Output
In / Output Impedence	75Ω / Auto Terminating Output
Power Requirement	24 VDC / 90-240 VAC
Power Consumption	100 Watts
Enclosure	Black Powder-Coated Steel
Mounting	Mounting Stand (shown) Included; VESA Mounting 100x100mm, 100x200mm, 200x200mm
Operating Temperature	32° to 104° F / 0° to 40° C
Humidity	10-90% RH
Shock	50 G (11 msec, 1/2 sine)
Vibration	1.5G RMS 10-300 HZ
Approvals	UL/cUL, FCC, CE, RoHS
Dimensions	30.0" (W) x 18.5" (H) x 3.3" (D) / 762 (W) x 469.9 (H) x 83.82 (D) mm
Weight	32 lbs. / 14.5 kg

VM-32D2

32" Customizable HD LCD Monitor

Dimensions:

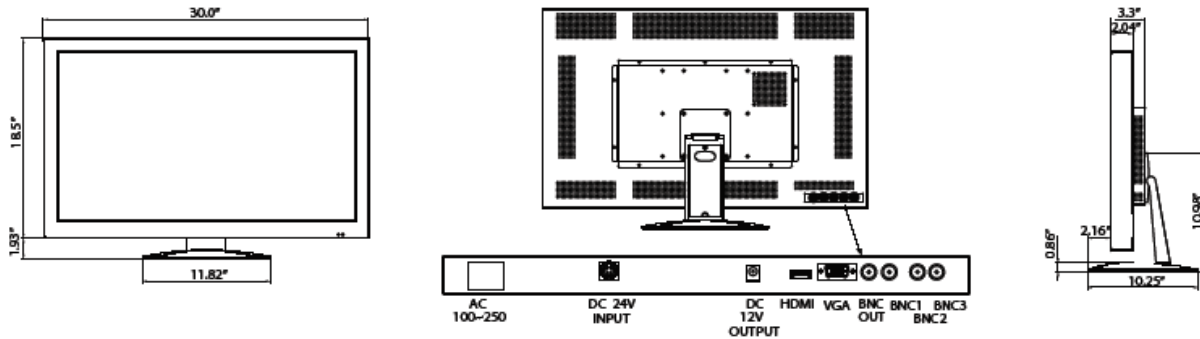

Standard Accessories:

- AC Power Cord
- Tabletop Stand
- VGA Cable
- Remote Control

Available Options:

- Protective/Anti-Reflective Glass Screen
- Panel Mount
- Touch Screen
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications