



VM-17B-24V

Customizable Industrial Monitor

- 17" TFT Active Matrix Color LCD
- High Resolution: 1280 x 1024 (SXGA)
- 24 VDC Operation
- Video Inputs: VGA, BNC Loop-Thru (3 BNC In, 1 BNC Out)
- NTSC/PAL Auto-Recognition
- Lockable OSD Controls
- Compact; Less Than 2" Deep
- Can Be Customized to Meet Your Needs
- 3 Year Warranty


The VM24-17B monitor offers a variety of video inputs, and are available in standard, open frame, rack mount, panel mount, and touch screen configurations. The 24 VDC power is ideal for industrial plants that are shifting away from 120 VAC cabinets. An extensive list of available OEM options enables you to customize a solution to your specific needs.

TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit www.TRU-VuMonitors.com for more details.

Specifications	
LCD Panel	17" TFT Color LCD
Resolution	1280 x 1024 (SXGA)
Viewing Area	13.3" (W) x 10.64" (H)
Pixel Pitch	0.264mm x 0.264mm
Display Colors	16.7 Million
Aspect Ratio	4:3
Brightness	300 nits
Contrast Ratio	800:1
Viewing Angle	170° (H) x 160° (V)
Response Time	5 msec (gray to gray)
Control	OSD (On-Screen Display) via Front Panel Pushbuttons
Video Inputs	VGA, Composite, BNC Loop-Thru, NTSC/PAL Auto-Recognition
Analog Video In / Out	3 BNC Inputs/ 1 BNC Output
In / Output Impedance	75Ω / Auto Terminating Output
Power Requirement	24 VDC
Power Consumption	35 Watts
Enclosure	ABS
Mounting	75 mm x 75 mm VESA; Mounting Stand Optional
Operating Temperature	14° to 122° F / (-10° to 50° C)
Humidity	5-90% RH
Shock	50 G (20 msec, 1/2 sine)
Vibration	1.5G RMS 10-200 HZ
Approvals	UL/cUL, FCC, CE, TUV, RoHS
Dimensions	14.8" (W) x 12.4" (H) x 1.9" (D) / (375.92 (W) x 314.96 (H) x 48.26 (D) mm)
Weight	8 lbs. / (3.6 kg)

VM-17B-24V

Dimensions:

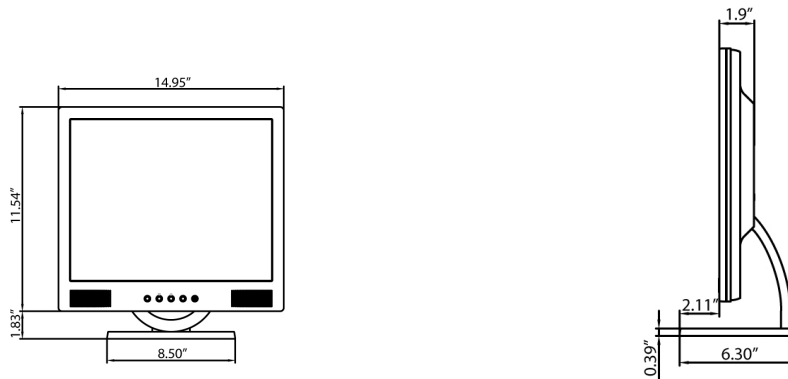

Available Options:

- 90–240 VAC Power Brick
- Tabletop Stand
- Protective/Anti-Reflective Glass Screen
- Panel Mount
- Touch Screen
- Rack Mount
- Open-Frame Configuration
- Private Label
- Other Customer – Specific Modifications